



PRODUCT DATA SHEET

Indicta

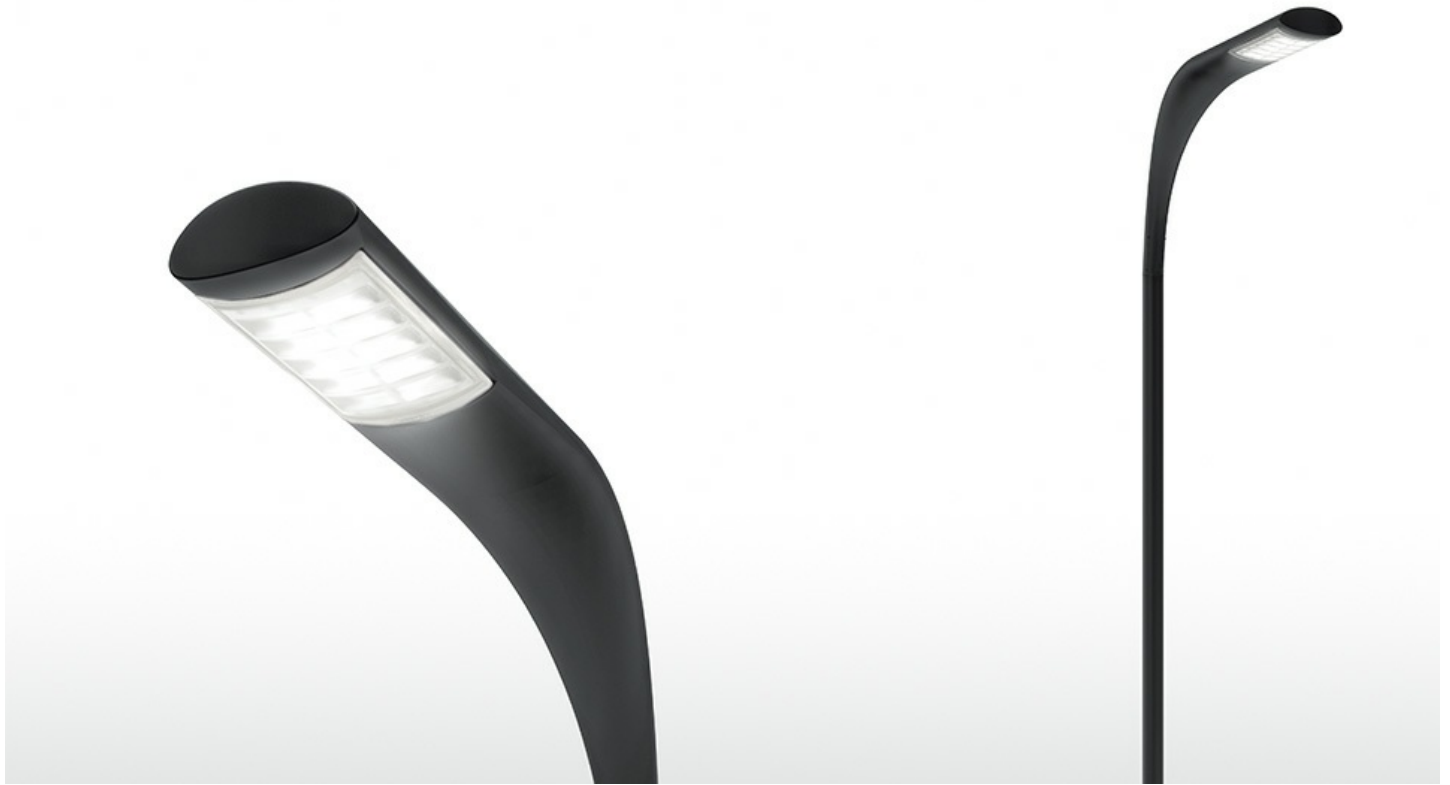


Light fixture with direct emission, with high-performance LED light sources. $\varnothing 60\text{mm}$ pole installation with $\varnothing 35 \times 120\text{mm}$ shank (not supplied). Anthracite grey finish. Composed by optical housing and support for pole installation. Optical housing in extruded EN-AW-6060 aluminium, chromate treated and painted with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. UV resistant diffuser in shock resistant polycarbonate. High-efficiency asymmetrical optics in metalized polycarbonate. Optical housing support in high-resistance mass-coloured reinforced polymers.

LED Floor

   650° IP65



W	Dimensions	Luminous Flux (lm)	Color	Code
23W	18x90 cm	1341lm		T084800



Indicta LED	LED	luminaire
Power	23W	23W
Flux	1633lm	1341lm
CCT	4000K	4000K
CRI	80 typ	
Color Tolerance	4SDCM	
Service Life	L70(6K)>35.600h	
Efficiency		82%
Efficacy	82lm/W	58lm/W

Designers



› Ernesto Gismondi