


PH Wall

The fixture is designed based on the principle of a reflective three-shade system, which directs the light downwards. The shades have a matt white painted inside to ensure diffuse, comfortable light distribution.




Poul Henningsen

Poul Henningsen was born in Copenhagen by the famous Danish writer Agnes Henningsen. He never graduated as an architect, but studied at The Technical School at Frederiksberg, Denmark from 1911-14, and then at Technical College in Copenhagen from 1914-17.

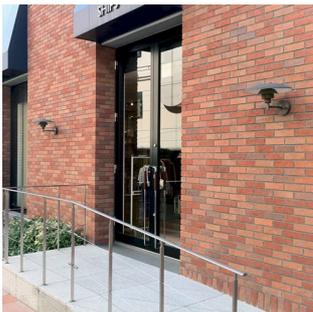

Osaka Abeno District Town Development

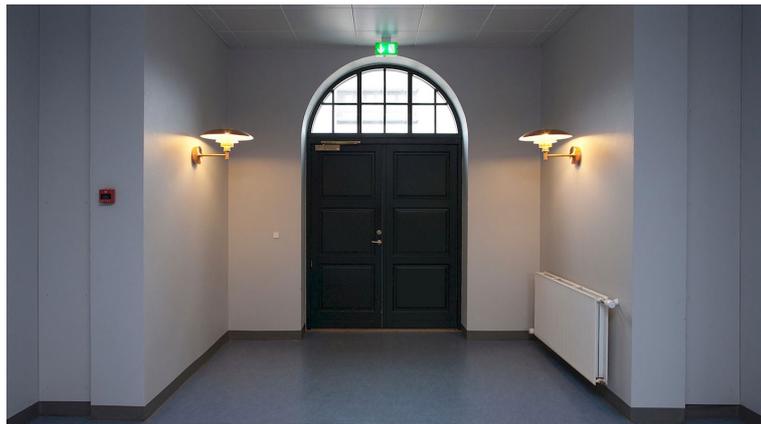

Esbjerg Sygehus

Product info

Information

Please note that the copper surface is untreated in order to achieve a verdigris finish over time. This can result in an inconsistent surface finish prior to the product achieving full patina. This process might have begun already during stocking/ transportation.

Mounting

Terminal block: 1x3x2.5mm². Cable entries: 2x bottom + 2x rear entries for Ø 10-14.5mm cable or 2x rear entries for Ø 10-14.5mm cable. Looping: Approved, max. 3x1.5mm².

Finish

Copper, brushed.

Materials

Shades: Spun copper. Wall box: Copperplated, spun brass. Arm: Copperplated, brass.

Sizes and weights

Width x Height x Length (mm) | 450 x 290 x 505 Max 6.8 kg

Class

Ingress protection IP23. Electric shock protection I w. ground.

Specification notes

The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On www.louispoulsen.com we update a list of recommendable light sources.

Light source

1x100W E27

Information

Please note that the copper surface is untreated in order to achieve a verdigris finish over time. This can result in an inconsistent surface finish prior to the product achieving full patina. This process might have begun already during stocking/ transportation.



Product variants

Light source	Body
1x100W E27	BOX W/O SIDE CABLE HOLES
	BOX W/SIDE CABLE HOLES

Product description

The fixture is designed based on the principle of a reflective three-shade system according to PH's logarithmic spiral.

The size of the three shades is adjusted for optimum performance and comfort.

A straight wall arm mounted in a round wall box holds the fixture.

The surface will change/patinate over time according to the environmental conditions of the air.

Is a member of a product family for both outdoor and indoor.

Iconic design.

Mounting

Terminal block: 1x3x2,5mm².

Cable entries: 2x bottom + 2x rear entries for Ø 10-14,5mm cable or 2x rear entries for Ø 10-14,5mm cable.

Looping: Approved, max. 3x1,5mm².

Light description

The fixture emits symmetrical light directed downwards.

The white painted matt inside of the shades ensures a uniform and comfortable light distribution.

Design

Poul Henningsen

Material

Shades: Spun copper heavy gauge untreated brushed. All shades have white wet painted undersides.

Wall box: Copper plated, spun brass.

Arm: Copper plated, brass.

Weight


Min: 6.8 kg Max: 6.849 kg

Finish


Brushed copper

Light distribution diagrams


Cartesian

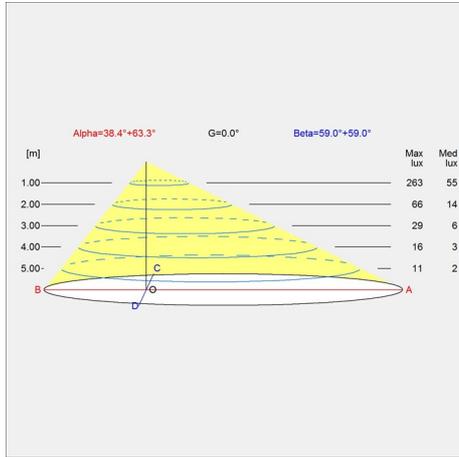

Isolux

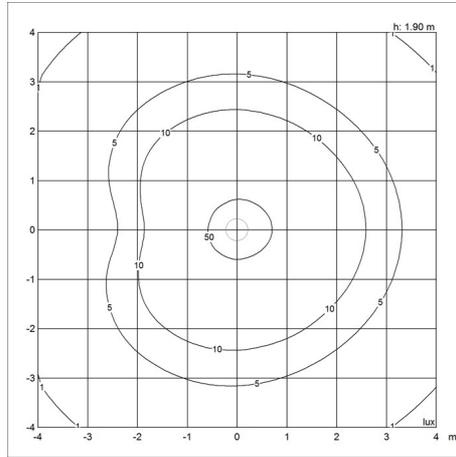

Polar

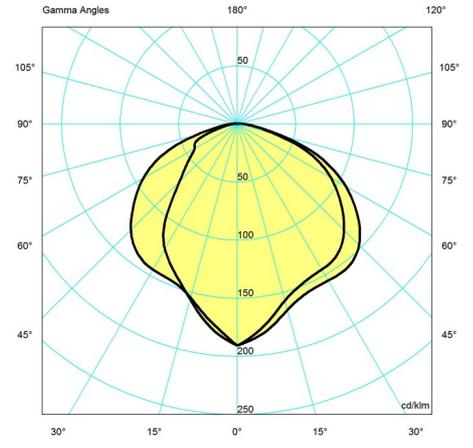

Spare parts & accessories

Product

PH WALL, FINGER SCREW+WASHER
 ANTI-THEFT SCREWS 3 PCS M8X20, COPPER

Variant number

5743590432
 5747293476