


Enigma 425

Project name:

Project type:

Notes:

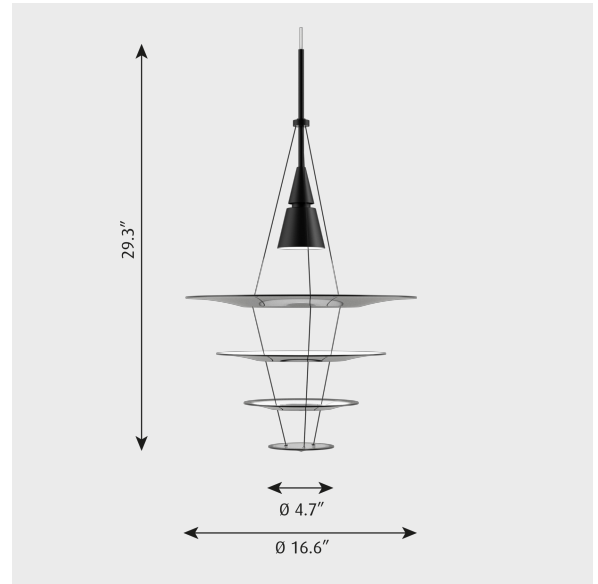

Design

Shoichi Uchiyama

Product description

Enigma pendants incorporate a top mounted light source projecting light downward through a series of thin acrylic slightly contoured rings that appear to be floating, providing a transparent and light expression. The shades are carefully designed and positioned to prevent direct view of the light source while providing ample light distribution.

Variant options

Color	Cable type	Light source	Voltage frequency
<input checked="" type="radio"/> Black <input type="radio"/> Br alu	BLK WHT	1/50W/PAR16 GU10	120V

Specification notes

a. Brushed aluminum finish comes with white cord and canopy. b. Black finish comes with black cord and canopy.

Light description

The fixture emits glare-free, soft, comfortable downward light. The shade design ensures even illumination of the surfaces. The matte upper surfaces of the rings diffuse the light, while the glossy lower surfaces provide optimal reflection.

Mounting

Mounts onto a 4 inch octagonal outlet box. Canopy: Black or white to match pendant finish, flat cone profile, 5.3 IN diameter x 1 IN tall. Cord type: 3-conductor, 18 AWG white or black PVC power cord. Cord length: 12 feet. Provided with a 8 Watt, 3000K, dimmable LED GU10 lamp.

Information

Electrical:
 System Wattage: 8W
 LED Wattage: 7 W
 Delivered lumens: 341 - 487
 Efficacy: 42.6 lm/W - 60.9 lm/W
 Certifications:
 cULus, Dry Location
 Protection class IP20
 Controllability: Phase dimming
 Actual performance dependent upon screw-base lamp used.

Finish

Black, Br alu

Material

Shades: Cast acrylic 0.2 IN thick, in opal white or black. Canopy: xx" diameter x xx", spun aluminum. Socket housing: spun and machined aluminum. Socket: Porcelain, GU10 bi-pin for PAR reflector style lamps. Shade wires are stainless steel, uncoated for aluminum color pendant, with black PVD coating for black color pendant. Standard finish on socket housing is matte, wet paint in aluminum color or black. Aluminum colored or black, wet painted brushed aluminum. Shades: White or black acrylic.

Weight

Min: 0 lbs Max: 0 lbs

Other functions

Longer cord lengths.


Voltage

120V


Light distribution diagrams

For the full data set on all variants, see louispoulsen.com.


Cartesian

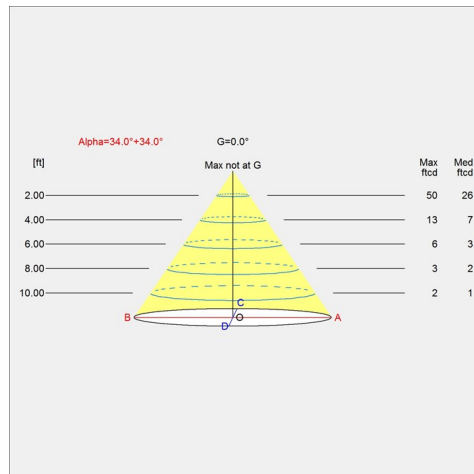

Isolux

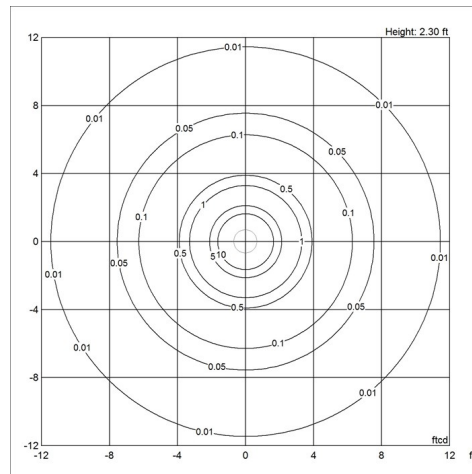

Polar

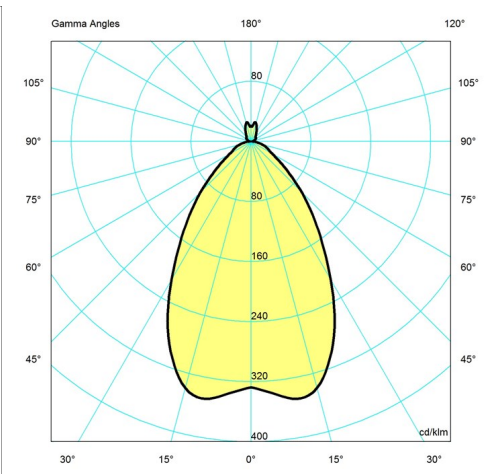

Variant options

Color	Cable type	Light source	Voltage frequency	Variant number
<input checked="" type="radio"/> Black	BLK	1/50W/PAR16 GU10	120V	10000146255
<input type="radio"/> Br alu	WHT	1/50W/PAR16 GU10	120V	10000146254