

ILIUM PENDANT

Foster + Partners

Lampade a sospensione con sorgente alogena e LED, per una luce diffusa e dimmerabile a seconda delle versioni. La struttura è composta da un diffusore interno polimerico opalino (tranne nella versione pendant LED) e da un diffusore esterno in vetro trasparente cannettato.



77 E27 LED/HALO/FLUO

LAMPING

Source	E27 halo par20 bulb
Total power	50W
Emission	downlight, flood
Switching	dimnable, according to bulb
Tension	230V
Materials	aluminium + glass
Notes	cable length 3m
Net lamp weight	3,5 kg

Codes

ILI HHC 51

Structure/Diffuser


chrome/opal white

PACKAGE

Package 01

Dimension: 22x22x98 cm / Gross weight: 4,2 kg

Certificazioni

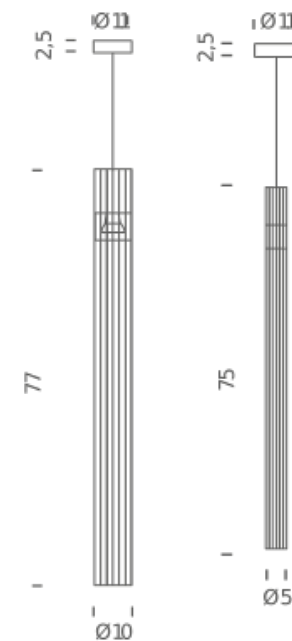

75 LED

LAMPING

Source	LED board
Total power	6W
Emission	downlight
Tension	110/230V
Color temperature	3000K
Luminous flux	345lm (source luminous flux)
Typ cri	85
Energy class	A+
Materials	aluminium + glass
Notes	cable length 3m
Net lamp weight	3,5 kg

Codes

ILI LHC 51

Structure/Diffuser

chrome/opal white

PACKAGE

Package 01

Dimension: 22x22x98 cm / Gross weight: 4,2 kg

Certificazioni

