

ZIRKOL – C

ZIRKOL – C è una famiglia di lampade circolari a sospensione ideale per l'illuminazione generale e decorativa di ambienti.

Corpo in alluminio anodizzato e schermo di protezione opale per un'illuminazione omogenea.

L'emissione di luce può essere diretta o bi-emissione con alto flusso luminoso e con tre differenti temperature colore.



HOME Ø 1M | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	2700K
Luminous flux	2616lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø100x5cm
Materials	Aluminium
Notes	Canopy included, 3 adjustable metal cables (length from 3m to 0,5m), shipped assembled.
Customization options	Shapes, sizes

Codes

BZRC1610G15DBO
BZRC1610G15DNE
BZRC1610G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 110x110x15 cm

Certificazioni

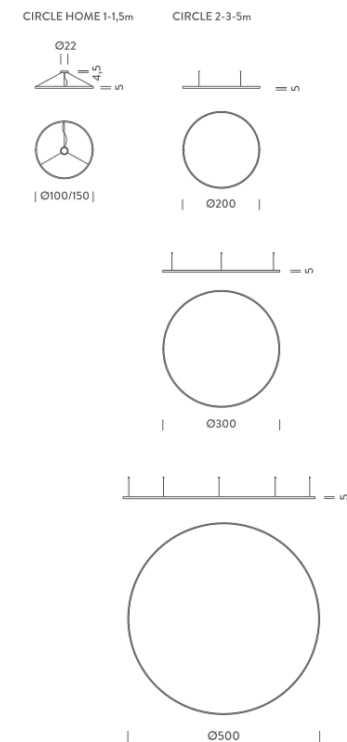

HOME Ø1M | UP - DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	2700K
Luminous flux	5231lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø100x5cm
Materials	Aluminium
Notes	Canopy included, 3 adjustable metal cables (length from 3m to 0,5m), shipped assembled.
Customization options	Shapes, sizes

Codes

BZRC1710G15DBO
BZRC1710G15DNE
BZRC1710G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 110x110x15 cm

Certificazioni

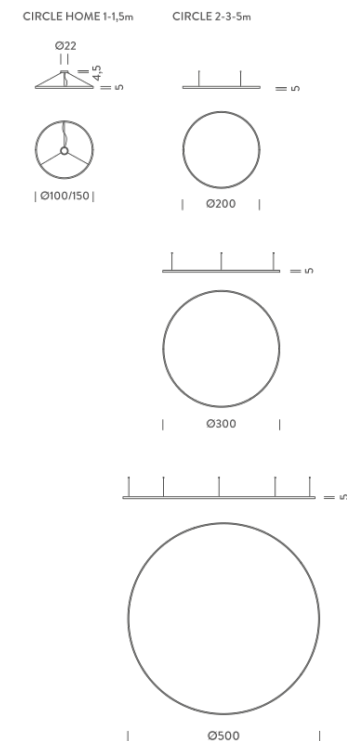

HOME Ø 1M | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	3000K
Luminous flux	2769lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø100x5cm
Materials	Aluminium
Notes	Canopy included, 3 adjustable metal cables (length from 3m to 0,5m), shipped assembled.
Customization options	Shapes, sizes

Codes

BZRC1610G15WBO
BZRC1610G15WNE
BZRC1610G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 110x110x15 cm

Certificazioni

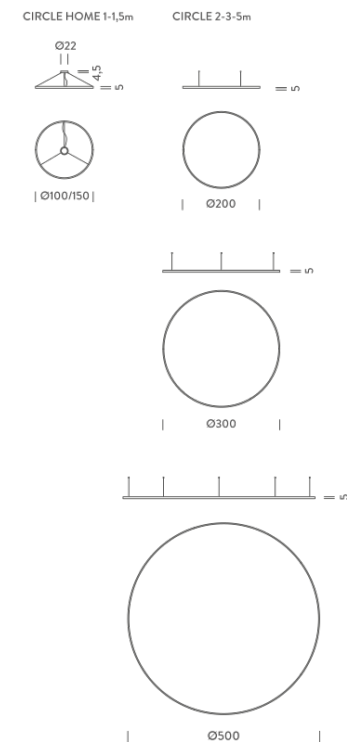

HOME Ø1M | UP - DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	3000K
Luminous flux	5539lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø100x5cm
Materials	Aluminium
Notes	Canopy included, 3 adjustable metal cables (length from 3m to 0,5m), shipped assembled.
Customization options	Shapes, sizes

Codes

BZRC1710G15WBO
BZRC1710G15WNE
BZRC1710G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 110x110x15 cm

Certificazioni

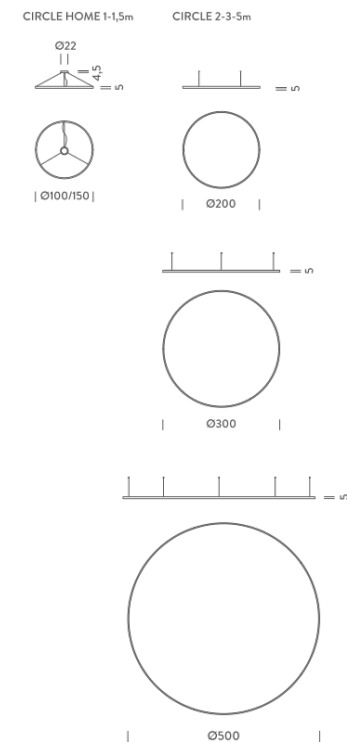

HOME Ø 1M | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	45W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	4000K
Luminous flux	3077lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø100x5cm
Materials	Aluminium
Notes	Canopy included, 3 adjustable metal cables (length from 3m to 0,5m), shipped assembled.
Customization options	Shapes, sizes

Codes

BZRC1610G15NBO
BZRC1610G15NNE
BZRC1610G15NOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 110x110x15 cm

Certificazioni



CIRCLE HOME 1-1,5m




| Ø100/150 |


CIRCLE 2-3-5m



| Ø200 |



| Ø300 |



| Ø500 |

HOME Ø 1M | UP - DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	4000K
Luminous flux	6154lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø100x5cm
Materials	Aluminium
Notes	Canopy included, 3 adjustable metal cables (length from 3m to 0,5m), shipped assembled.
Customization options	Shapes, sizes

Codes

BZRC1710G15NBO
BZRC1710G15NNE
BZRC1710G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm

Certificazioni

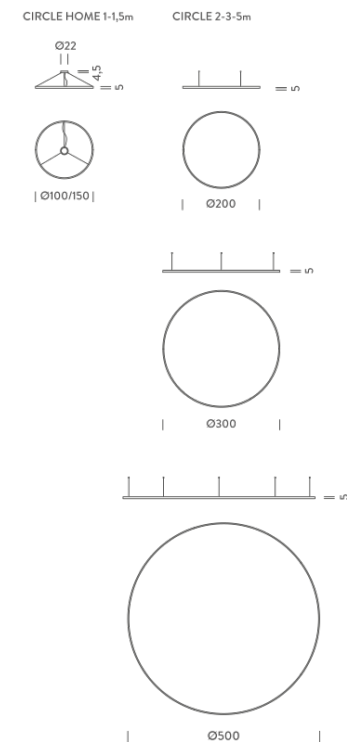

HOME Ø 1,5M | DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	2700K
Luminous flux	3923lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø150x5cm
Materials	Aluminium
Notes	Canopy included, 3 adjustable metal cables (length from 3m to 0,5m), shipped assembled.
Customization options	Shapes, sizes

Codes

BZRC1615G15DBO
BZRC1615G15DNE
BZRC1615G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm

Certificazioni

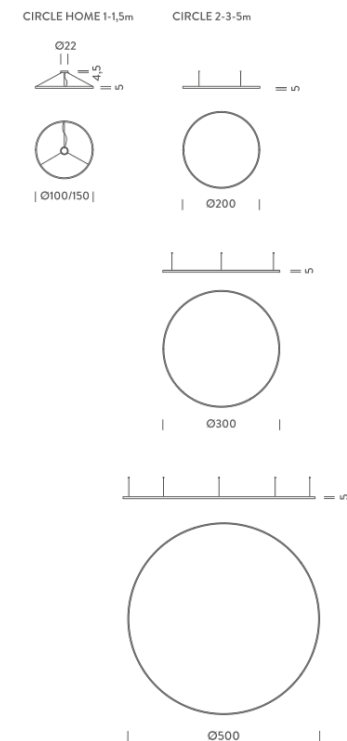

HOME Ø 1,5M | UP - DOWNLIGHT - 2700K

LAMPING

Source	Linear LED
Total power	136W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	7847lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø150x5cm
Materials	Aluminium
Notes	Canopy included, 3 adjustable metal cables (length from 3m to 0,5m), shipped assembled.
Customization options	Shapes, sizes

Codes

BZRC1715G15DBO
BZRC1715G15DNE
BZRC1715G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm

Certificazioni

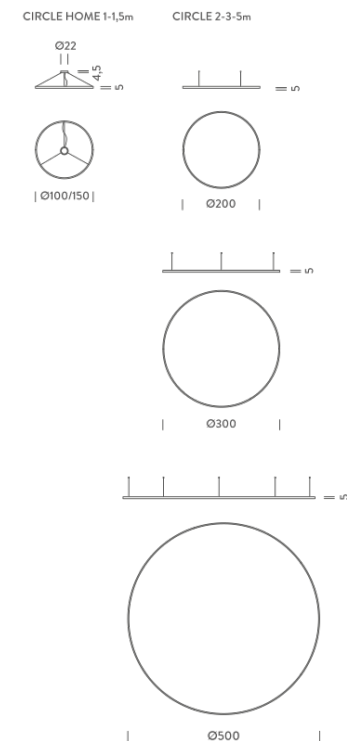

HOME Ø 1,5M | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	3000K
Luminous flux	4154lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø150x5cm
Materials	Aluminium
Notes	Canopy included, 3 adjustable metal cables (length from 3m to 0,5m), shipped assembled.
Customization options	Shapes, sizes

Codes

BZRC1615G15WBO
BZRC1615G15WNE
BZRC1615G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm

Certificazioni

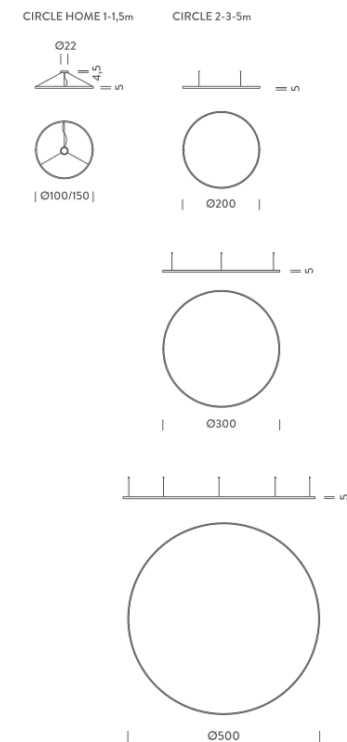

HOME Ø 1,5M | UP - DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	136W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	8308lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø150x5cm
Materials	Aluminium
Notes	Canopy included, 3 adjustable metal cables (length from 3m to 0,5m), shipped assembled.
Customization options	Shapes, sizes

Codes

BZRC1715G15WBO
BZRC1715G15WNE
BZRC1715G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm

Certificazioni

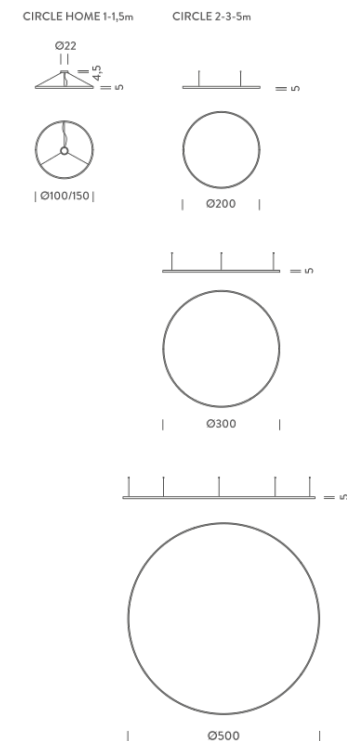

HOME Ø 1,5M | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	68W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	4000K
Luminous flux	4616lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø150x5cm
Materials	Aluminium
Notes	Canopy included, 3 adjustable metal cables (length from 3m to 0,5m), shipped assembled.
Customization options	Shapes, sizes

Codes

BZRC1615G15NBO
BZRC1615G15NNE
BZRC1615G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm

Certificazioni

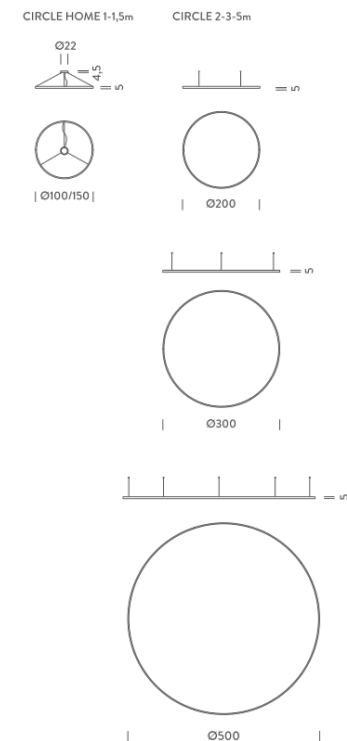

HOME Ø 1,5M | UP - DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	136W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	9232lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø150x5cm
Materials	Aluminium
Notes	Canopy included, 3 adjustable metal cables (length from 3m to 0,5m), shipped assembled.
Customization options	Shapes, sizes

Codes

BZRC1715G15NBO
BZRC1715G15NNE
BZRC1715G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

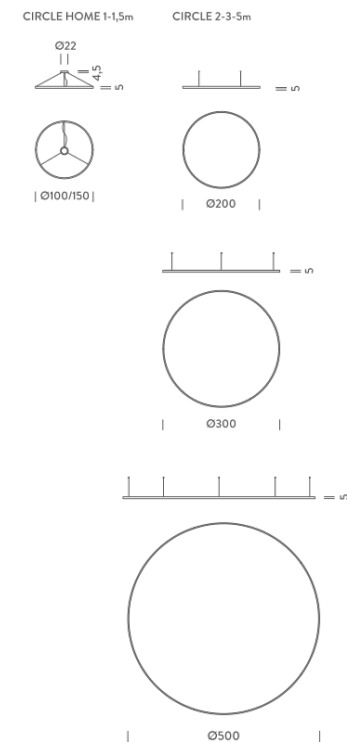

Ø 2M | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	3000K
Luminous flux	5539lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø200x5cm
Materials	Aluminium
Notes	4 adjustable metal cables (length from 3m to 0,5m), shipped into 2 arches
Customization options	Shapes, sizes

Codes

BZRC1620G15WBO
BZRC1620G15WNE
BZRC1620G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

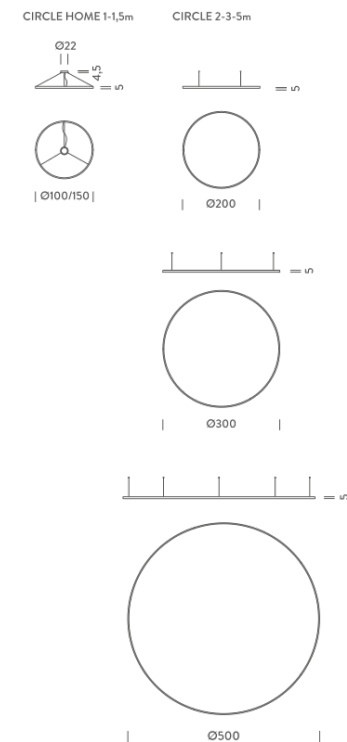

Ø 2M | UP - DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	180W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	11078lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø200x5cm
Materials	Aluminium
Notes	4 adjustable metal cables (length from 3m to 0,5m), shipped into 2 arches
Customization options	Shapes, sizes

Codes

BZRC1720G15WBO
BZRC1720G15WNE
BZRC1720G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

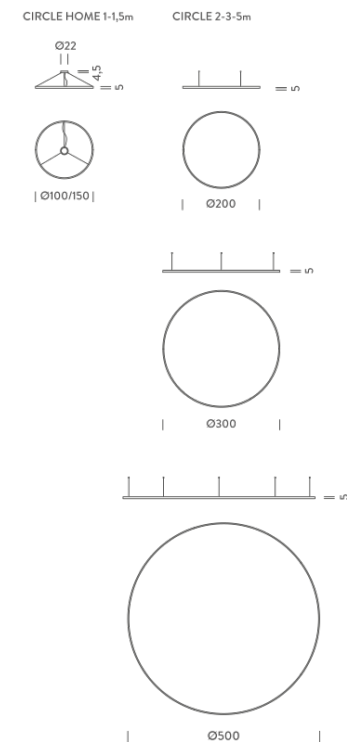

Ø 2M | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	90W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	4000K
Luminous flux	6154lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø200x5cm
Materials	Aluminium
Notes	4 adjustable metal cables (length from 3m to 0,5m), shipped into 2 arches
Customization options	Shapes, sizes

Codes

BZRC1620G15NBO
BZRC1620G15NNE
BZRC1620G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

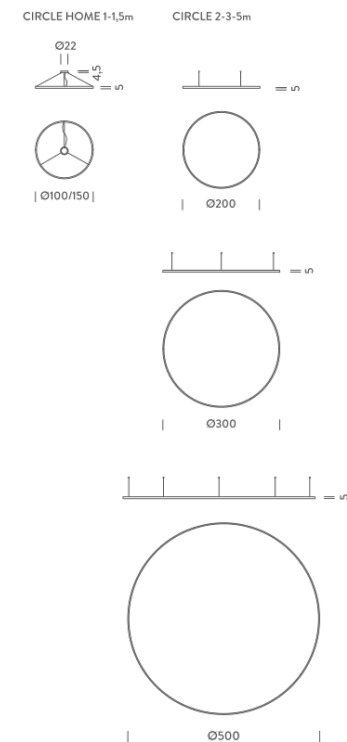

Ø 2M | UP - DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	180W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	12309lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø200x5cm
Materials	Aluminium
Notes	4 adjustable metal cables (length from 3m to 0,5m), shipped into 2 arches
Customization options	Shapes, sizes

Codes

BZRC1720G15NBO
BZRC1720G15NNE
BZRC1720G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm

Certificazioni

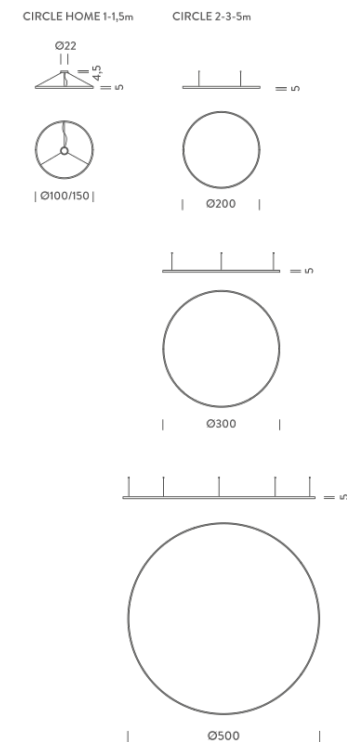

Ø 3M | DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	134W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	8238lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø300x5cm
Materials	Aluminium
Notes	6 adjustable metal cables (length from 3m to 0,5m), shipped into 3 arches
Customization options	Shapes, sizes

Codes

BZRC1630G15WBO
BZRC1630G15WNE
BZRC1630G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm

Certificazioni

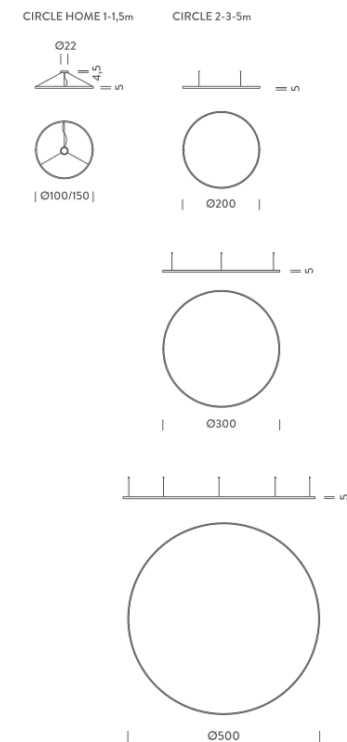

Ø 3M | UP - DOWNLIGHT - 3000K

LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	3000K
Luminous flux	16476lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø300x5cm
Materials	Aluminium
Notes	6 adjustable metal cables (length from 3m to 0,5m), shipped into 3 arches
Customization options	Shapes, sizes

Codes

BZRC1730G15WBO
BZRC1730G15WNE
BZRC1730G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm

Certificazioni

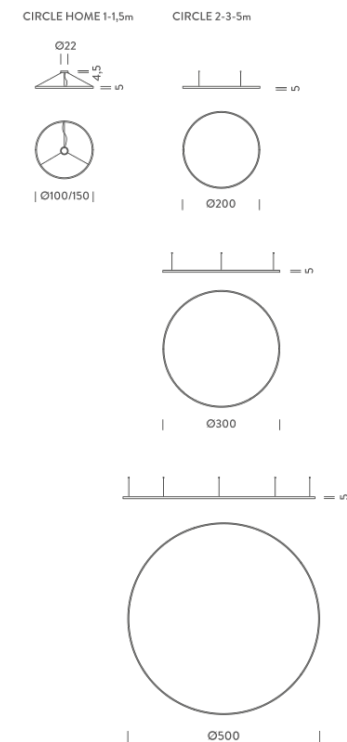

Ø 3M | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	134W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	9153lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø300x5cm
Materials	Aluminium
Notes	6 adjustable metal cables (length from 3m to 0,5m), shipped into 3 arches
Customization options	Shapes, sizes

Codes

BZRC1630G15NBO
BZRC1630G15NNE
BZRC1630G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm

Certificazioni

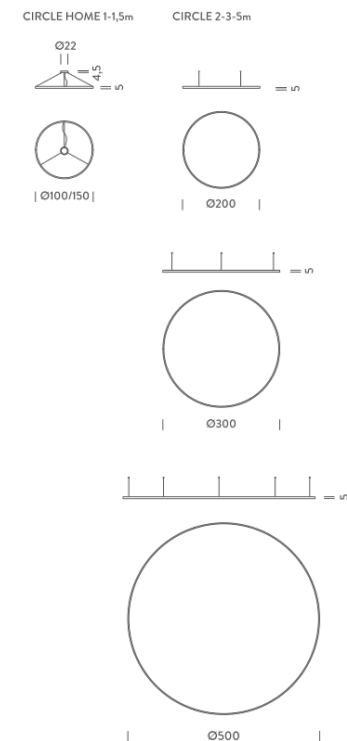

Ø 3M | UP - DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	268W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	4000K
Luminous flux	18306lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø300x5cm
Materials	Aluminium
Notes	6 adjustable metal cables (length from 3m to 0,5m), shipped into 3 arches
Customization options	Shapes, sizes

Codes

BZRC1730G15NBO
BZRC1730G15NNE
BZRC1730G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm

Certificazioni

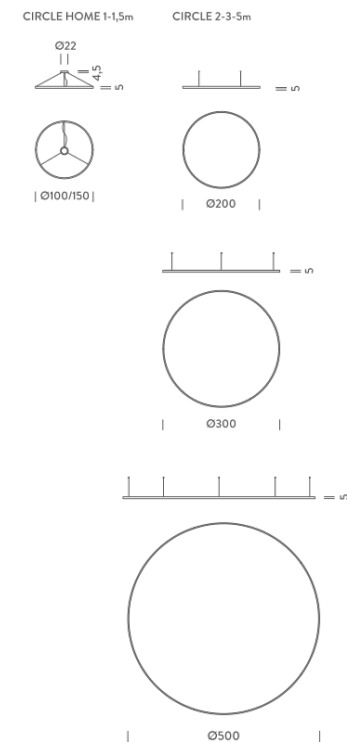

Ø 5M | DOWNLIGHT - 5000K

LAMPING

Source	Linear LED
Total power	226W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	13847lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø500x5cm
Materials	Aluminium
Notes	10 adjustable metal cables (length from 3m to 0,5m), shipped into 5 arches
Customization options	Shapes, sizes

Codes

BZRC1650G15WBO
BZRC1650G15WNE
BZRC1650G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm

Certificazioni

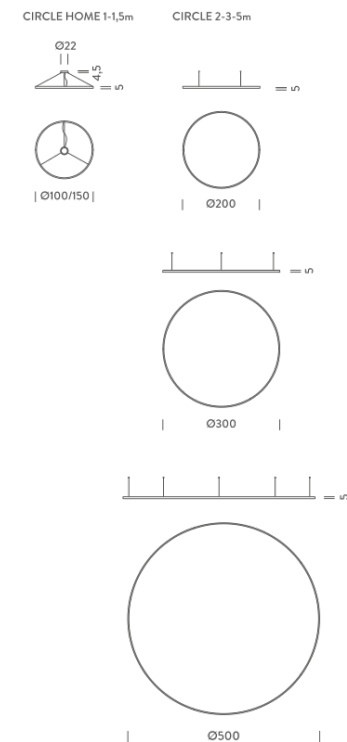

Ø 5M | UP - DOWNLIGHT - 5000K

LAMPING

Source	Linear LED
Total power	452W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	3000K
Luminous flux	27695lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø500x5cm
Materials	Aluminium
Notes	10 adjustable metal cables (length from 3m to 0,5m), shipped into 5 arches
Customization options	Shapes, sizes

Codes

BZRC1750G15WBO
BZRC1750G15WNE
BZRC1750G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm

Certificazioni

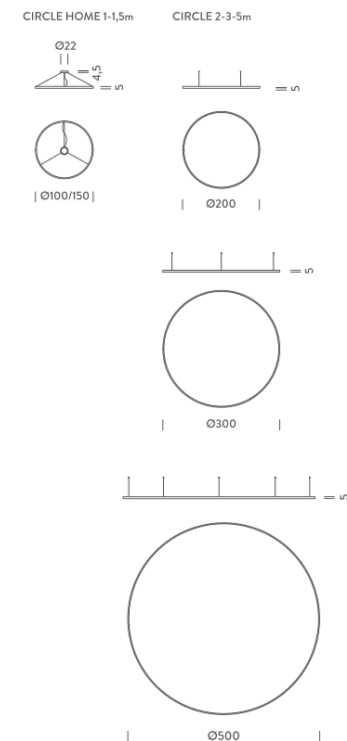

Ø 5M | DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	226W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	15386lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø500x5cm
Materials	Aluminium
Notes	10 adjustable metal cables (length from 3m to 0,5m), shipped into 5 arches
Customization options	Shapes, sizes

Codes

BZRC1650G15NBO
BZRC1650G15NNE
BZRC1650G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x110x15 cm

Certificazioni

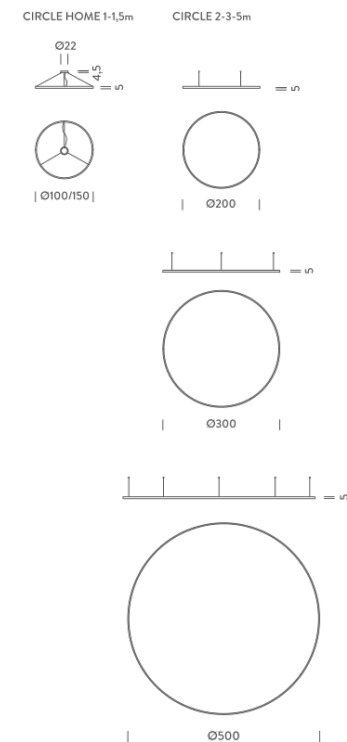

Ø 5M | UP - DOWNLIGHT - 4000K

LAMPING

Source	Linear LED
Total power	452W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	4000K
Luminous flux	30772lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	ø500x5cm
Materials	Aluminium
Notes	10 adjustable metal cables (length from 3m to 0,5m), shipped into 5 arches
Customization options	Shapes, sizes

Codes

BZRC1750G15NBO
BZRC1750G15NNE
BZRC1750G15NOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

